


# RFI Shield Clips

## Shield Clips for EMI/RFI Shields

- ❑ SMT devices offering a fast solution for assembling RFI shields to PCBs.
- ❑ Eliminates the need for through holes and post reflow operations.
- ❑ Saves PCB real estate.
- ❑ Facilitates easy removal of the can for maintenance and repair.
- ❑ Substantial improvement in time and simplicity of assembly tuning and re-work.

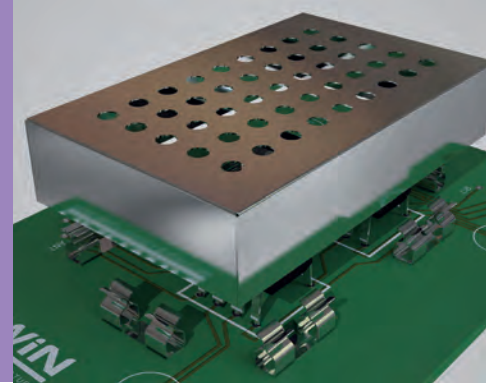

MAXI	MIDI												
<p style="text-align: right;">Shield Thickness 0.70-1.00mm</p> <p style="text-align: right;"><b>ORDER CODE</b> <b>S1411-46R</b></p> <p style="text-align: right;">Shield Thickness 0.17-0.30mm</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="background-color: #4a4a8a; color: white;">ORDER CODE</th> <th style="background-color: #4a4a8a; color: white;">MATERIAL</th> </tr> </thead> <tbody> <tr> <td style="background-color: #e0e0e0;"><b>S1711-46R</b></td> <td style="background-color: #e0e0e0;">Beryllium Copper</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>S2711-46R</b></td> <td style="background-color: #e0e0e0;">Cupro-Nickel</td> </tr> </tbody> </table> <p style="text-align: right;">Shield Thickness 0.20-0.30mm</p> <p style="text-align: right;"><b>ORDER CODE</b> <b>S0971-46R</b></p> <p style="text-align: right;">Shield Thickness 0.13-0.23mm</p> <p style="text-align: right;"><b>ORDER CODE</b> <b>S1721-46R</b></p>	ORDER CODE	MATERIAL	<b>S1711-46R</b>	Beryllium Copper	<b>S2711-46R</b>	Cupro-Nickel	<p style="text-align: right;">Shield Thickness 0.17-0.30mm</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="background-color: #4a4a8a; color: white;">ORDER CODE</th> <th style="background-color: #4a4a8a; color: white;">MATERIAL</th> </tr> </thead> <tbody> <tr> <td style="background-color: #e0e0e0;"><b>S1711-46R</b></td> <td style="background-color: #e0e0e0;">Beryllium Copper</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>S2711-46R</b></td> <td style="background-color: #e0e0e0;">Cupro-Nickel</td> </tr> </tbody> </table> <p style="text-align: right;">Shield Thickness 0.20-0.30mm</p> <p style="text-align: right;"><b>ORDER CODE</b> <b>S0971-46R</b></p> <p style="text-align: right;">Shield Thickness 0.13-0.23mm</p> <p style="text-align: right;"><b>ORDER CODE</b> <b>S1721-46R</b></p>	ORDER CODE	MATERIAL	<b>S1711-46R</b>	Beryllium Copper	<b>S2711-46R</b>	Cupro-Nickel
ORDER CODE	MATERIAL												
<b>S1711-46R</b>	Beryllium Copper												
<b>S2711-46R</b>	Cupro-Nickel												
ORDER CODE	MATERIAL												
<b>S1711-46R</b>	Beryllium Copper												
<b>S2711-46R</b>	Cupro-Nickel												
MINI	MINI												
<p style="text-align: right;">Shield Thickness 0.20-0.30mm</p> <p style="text-align: right;"><b>ORDER CODE</b> <b>S0971-46R</b></p> <p style="text-align: right;">Shield Thickness 0.13-0.23mm</p> <p style="text-align: right;"><b>ORDER CODE</b> <b>S1721-46R</b></p>	<p style="text-align: right;">Shield Thickness 0.13-0.23mm</p> <p style="text-align: right;"><b>ORDER CODE</b> <b>S1721-46R</b></p>												

All dimensions in mm.