


REV.	DATE	DESCRIPTION
NC	10/31/04	INITIAL RELEASE

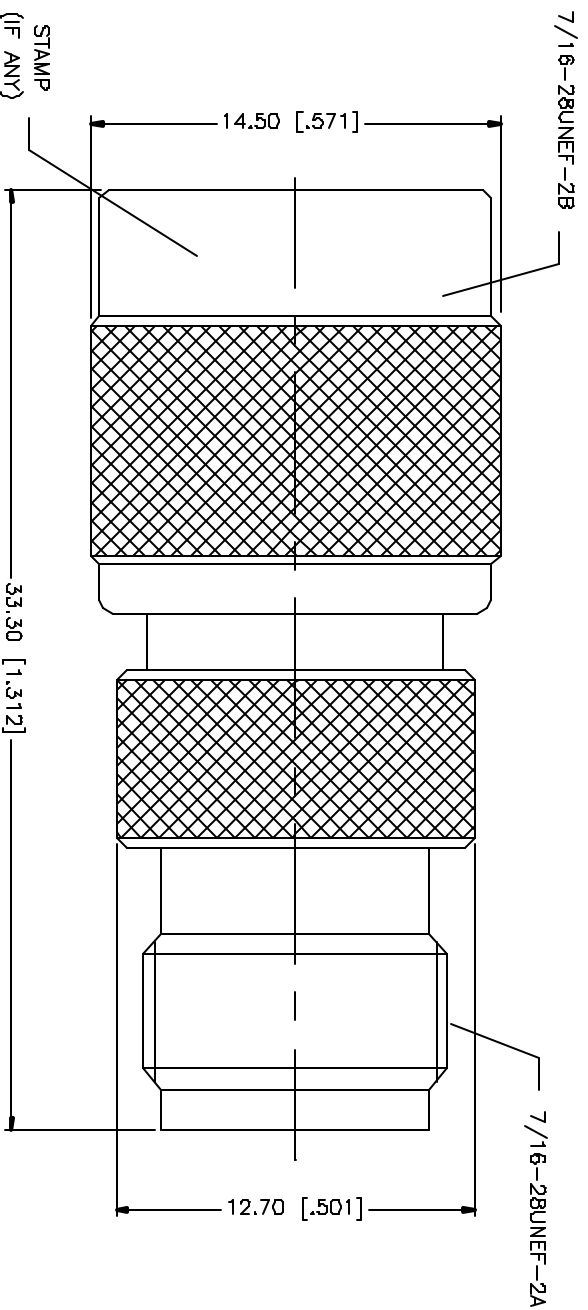

REV.	DATE	DESCRIPTION	MATERIAL	FINISH	QTY
8					
7					
6					
5					
4					
3			PHOS. BRONZE	GOLD	1
2			TEFLON	NATURAL	1
1			BRASS	NICKEL	1
		DESCRIPTION			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR DIMENSIONS IN MILLIMETERS USE THE FOLLOWING TOLERANCES FOR UNLESS OTHERWISE SPECIFIED	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS AND FOR DIMENSIONS IN INCHES USE THE FOLLOWING TOLERANCES FOR UNLESS OTHERWISE SPECIFIED
0.5 - 8mm ± 0.20mm	0.5 - 30mm ± 0.40mm
8 - 30mm ± 0.40mm	30 - 120mm ± 0.50mm
120 - 300mm ± 0.63mm	300 - 1000mm ± 0.75mm
1000mm and over ± 1.00mm	1000mm and over ± 1.25mm
FRACTIONS	FRACTIONS
1/16" ± 0.007"	1/16" ± 0.007"
1/32" ± 0.015"	1/32" ± 0.015"
3/16" ± 0.015"	3/16" ± 0.015"
1/8" ± 0.020"	1/8" ± 0.020"
1/4" ± 0.020"	1/4" ± 0.020"
3/8" ± 0.020"	3/8" ± 0.020"
1/2" ± 0.020"	1/2" ± 0.020"
3/4" ± 0.020"	3/4" ± 0.020"
1" ± 0.020"	1" ± 0.020"
1.180 - 4.724 = ± 0.020"	1.180 - 4.724 = ± 0.020"

APPROVALS	DATE
DRAWN G.R.S.	10/31/04
CHECKED	
ISSUED	
DWG FILE	
C:/122/122498-75.DWG	

PART DESCRIPTION	DWG. NO.	REV.	SIZE	SCALE
TNC PLUG TO JACK ADAPTER (75 ohms)	122498-75	NC	A	NA

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR DIMENSIONS IN MILLIMETERS USE THE FOLLOWING TOLERANCES FOR UNLESS OTHERWISE SPECIFIED	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS AND FOR DIMENSIONS IN INCHES USE THE FOLLOWING TOLERANCES FOR UNLESS OTHERWISE SPECIFIED
0.5 - 8mm ± 0.20mm	0.5 - 30mm ± 0.40mm
8 - 30mm ± 0.40mm	30 - 120mm ± 0.50mm
120 - 300mm ± 0.63mm	300 - 1000mm ± 0.75mm
1000mm and over ± 1.00mm	1000mm and over ± 1.25mm
FRACTIONS	FRACTIONS
1/16" ± 0.007"	1/16" ± 0.007"
1/32" ± 0.015"	1/32" ± 0.015"
3/16" ± 0.015"	3/16" ± 0.015"
1/8" ± 0.020"	1/8" ± 0.020"
1/4" ± 0.020"	1/4" ± 0.020"
3/8" ± 0.020"	3/8" ± 0.020"
1" ± 0.020"	1" ± 0.020"
1.180 - 4.724 = ± 0.020"	1.180 - 4.724 = ± 0.020"

Amphenol Connex

TNC PLUG TO JACK ADAPTER
(75 ohms)

122498-75